


CM replacement hooks with latch




- Attaches easily to standard chain of electric hoist using welded link load chain, roller chain or wire rope with applicable end fitting
- Swivel jaw is forged

Product code	UPC 43927-	Working load limit* (tons)	Dimensions (inches)					Approx. weight each (lbs.)
			B	C	L	O	R	
M133	46039	1/2	.438	.500	6.42	1.000	4.89	2.00
M134	46020	1	.437	.500	7.56	1.125	5.625	2.56

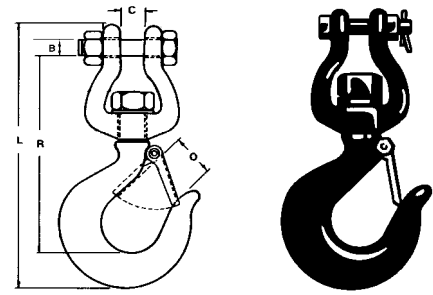

CM alloy swivel hooks

- Alloy steel
- Heat treated, quenched & tempered
- Design factor 5-1
- Built in distortion detectors
- Pre-drilled for 1300 series latch kits



Without latch

Hook product code	UPC 43927-	Working load limit* (tons)	Dimensions (inches)															Approx. weight each kit (lbs.)	Latch kit (optional)
			A	B	C	D	E	F	G	H	I	L	R	S	T	O			
M3402A	46280	1	2.00	1.11	1.25	3.15	1.00	1.25	.87	1.00	.63	5.88	4.63	.38	.81	.88	1.00	4X1302	
M3403A	46281	1 1/2	2.50	1.38	1.50	3.47	1.08	1.38	.96	1.11	.72	6.89	5.44	.50	.94	.94	1.50	4X1303	
M3404A	46282	2	3.00	1.65	1.75	3.78	1.13	1.50	1.04	1.21	.86	7.93	6.25	.63	1.00	1.00	2.60	4X1304	
M3405A	46283	3	3.00	1.65	1.75	4.22	1.25	1.63	1.27	1.43	.94	8.25	6.49	.63	1.19	1.13	3.10	4X1305	
M3407A	46284	5	3.50	1.77	2.00	5.07	1.53	2.00	1.44	1.62	1.15	9.72	7.53	.75	1.44	1.38	5.30	4X1307	
M3409A	46285	7	4.75	2.39	2.75	6.30	1.97	2.50	1.74	2.01	1.51	12.41	9.60	1.00	1.88	1.69	10.40	4X1309	
M3411A	46286	11	5.50	2.55	3.25	7.69	2.25	3.00	2.25	2.63	1.90	15.43	12.06	1.13	2.31	1.94	16.25	4X1311	

Assembled with latch


Hook & latch assembled		Working load limit* (lbs.)	Approx. weight each (lbs.)
Product code	UPC 43927-		
M3502A	46287	1	1.5
M3503A	46288	1 1/2	2
M3504A	46289	2	3
M3505A	46290	3	3.5
M3507A	46291	5	7.5
M3509A	46292	7	14
M3511A	46293	11	16.25

CM claw hook


- Especially designed for easy hook-up to loose or taut chain with one hand connection.
- Drop forged from special bar quality steel.
- Heat treated for greater strength and increased wear characteristics.
- Allows full joint strength when used with high test grade 43 or transport grade 70 chain.
- Clear protective finish resists rust and provides cleaner handling.
- For use with 3/8" G43 or G70 chain.
- Working load limit 6,600 lbs.

• Working load limit 6,600 lbs.										Approx. weight each (lbs.)
Product code	UPC 43927-	Dimensions (inches)							Factory pack**	
		A	B	C	D	E	F	G		
M206C	41356	2 5/32	4 3/16	1/2	1 1/16	1 5/8	—	—	10	1.15
M806C	41350	2 5/32	4 1/8	15/32	—	—	7/16	1/2	10	1.20

**Bulk pack on request.



Eye type
Part no. M206C



Clevis type
Part no. M806C